Data Collection and Analysis to Determine Instream-Flow Needs:

Jennifer Krstolic, USGS, Richmond, Virginia





What are Instream-Flows?

- Instream-flow techniques can be used to help reserve water within the channel for the benefit of fish and other aquatic life. Research took the form of analyses correlating the well-being of fish populations with physical and chemical attributes of the flow regime.
- The result can be a single 'minimum' flow value for a stream reach, below which water may not be withdrawn for consumptive use.

water velocity water depths

instream objects as cover bottom substrate materials

water temperature dissolved oxygen

total alkalinity turbidity

light penetration through the water column




Instream-Flow Studies are Used to Study and Manage Habitat in Altered Systems

Active Projects of Patuxent Wildlife Research Center, Athens Georgia:


- Technical Assistance in developing an adaptive approach to hydropower management
- Effects of instream flow depletion on biological integrity of fish communities
- Technical Assistance in assessing and developing instream flow and river management policies
- Relations between stream biotic integrity and proportion of annual surface water runoff allocated for human use
- Conservation status of fish and other aquatic resources in the upper Tallapoosa River system, Georgia and Alabama
- http://www.pwrc.usgs.gov/freeman.htm



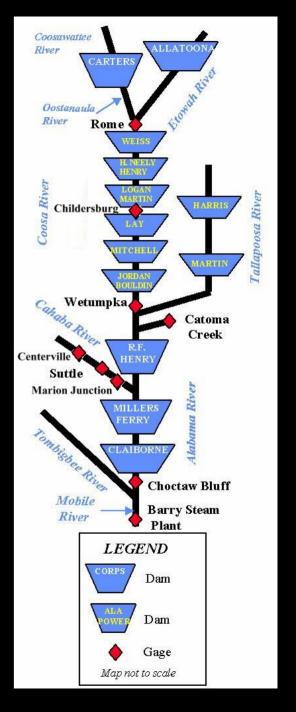

Instream-Flow Model for Pennsylvania and Maryland Trout Streams


- Hydraulic models developed for more than 100 sites on 72 streams
- Model will predict effects of withdrawals on trout habitat
- Considering ground-water pumping effects on streamflows in permitting process
- www.dep.state.pa.us/dep/deputate/water mgt/Wc/subjects/InstreamFlow.htm

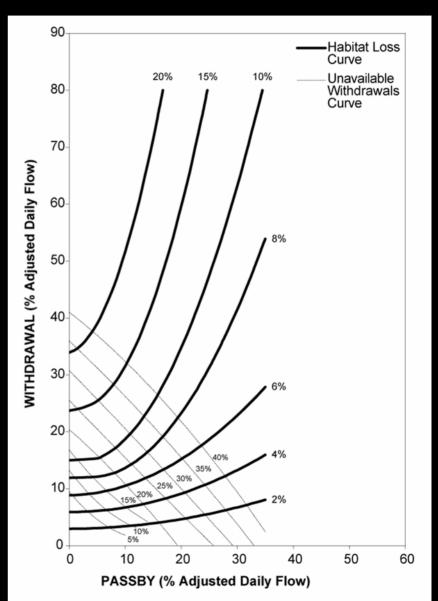



Natural Flow Regime, a Paradigm for River Conservation and Restoration

- N. LeRoy Poff and others, 1997
- The ecological integrity of river ecosystems depends upon their natural dynamic character
 - Magnitude and Frequency
 - Timing
 - Duration
 - Rate of Change

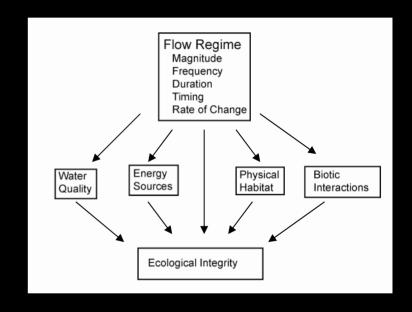

Additional References:


http://lamar.colostate.edu/~poff/natflowrefs.html



 Zachary H. Bowen, Ken D. Bovee, Terry J. Waddle






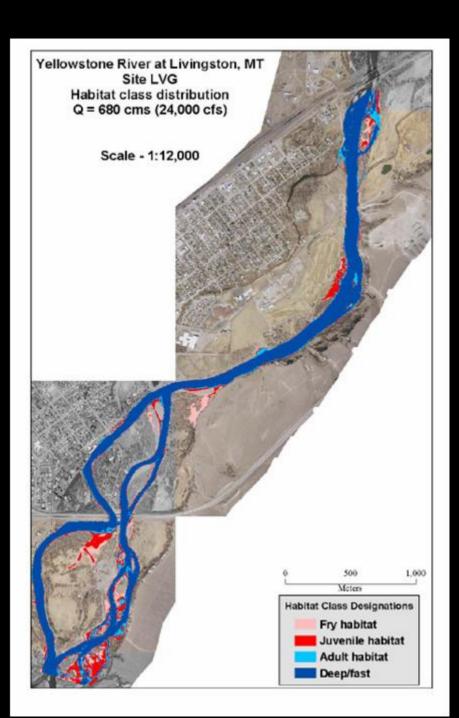

 Zachary H. Bowen, Ken D. Bovee, Terry J. Waddle






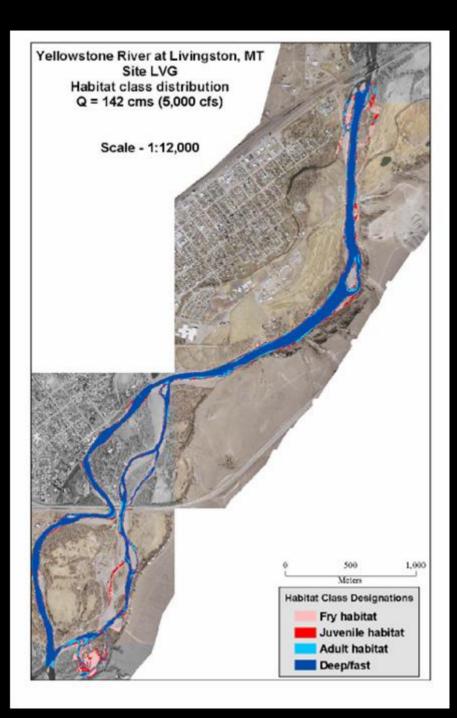

 Zachary H. Bowen, Ken D. Bovee, Terry J. Waddle






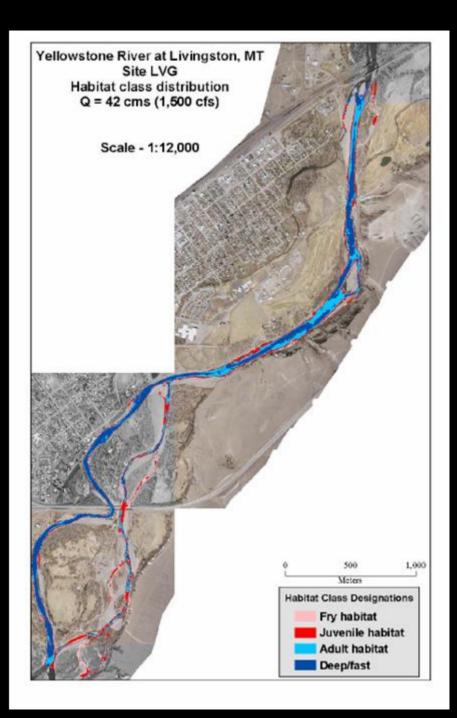

 Zachary H. Bowen, Ken D. Bovee, Terry J. Waddle






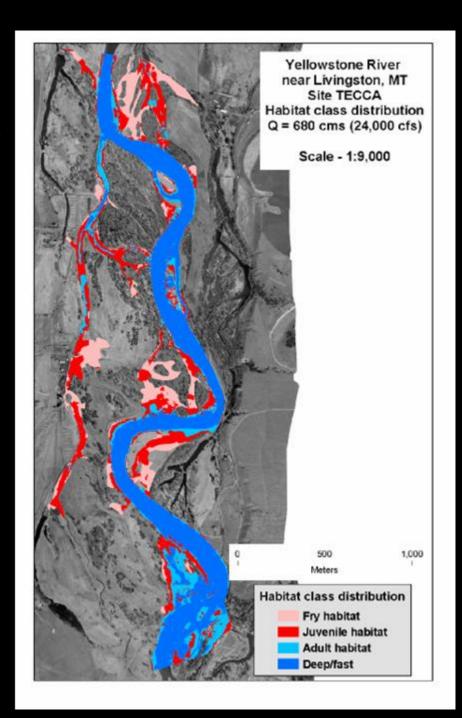

 Zachary H. Bowen, Ken D. Bovee, Terry J. Waddle






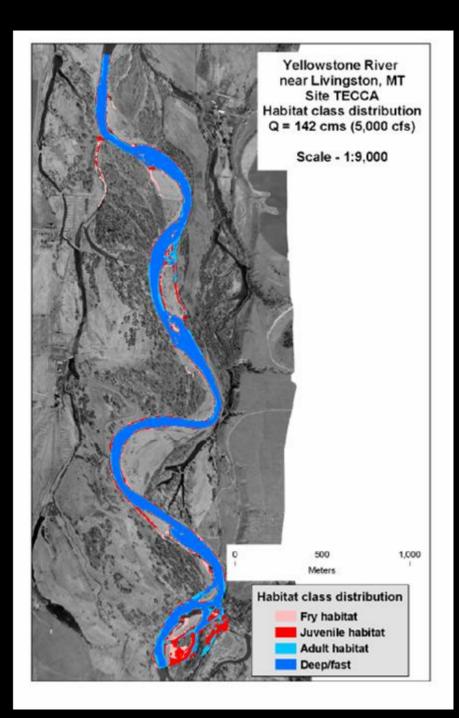

 Zachary H. Bowen, Ken D. Bovee, Terry J. Waddle





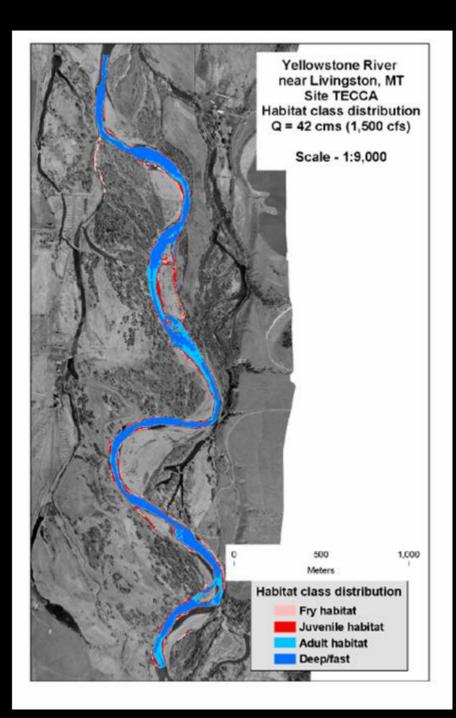

Instream Flow Incremental Methodology

Study of the North Fork Shenandoah River, Virginia




Jennifer L. Krstolic, Donald C. Hayes, and Peter M. Ruhl

In cooperation with:

The Northern Shenandoah Valley Regional Commission



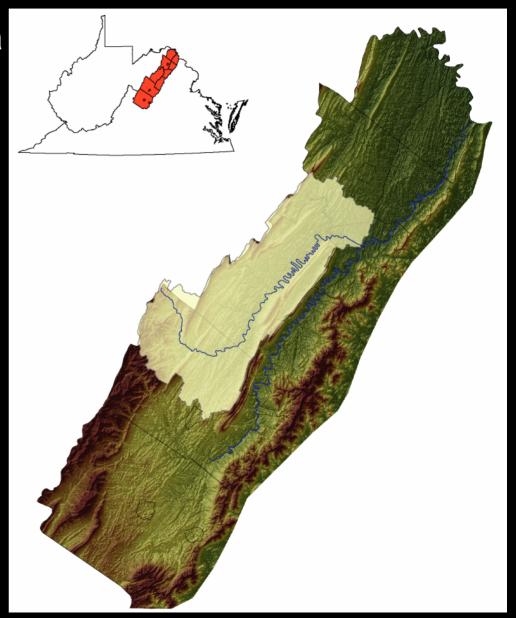


North Fork Shenandoah River Study Sites and Stream Gages









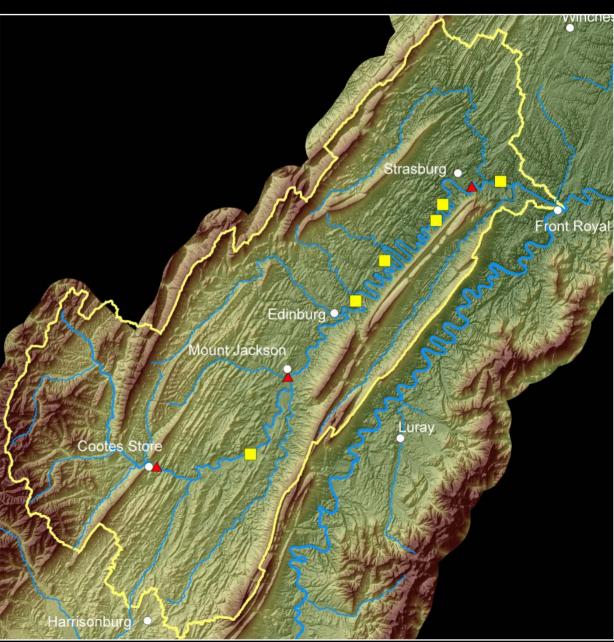

Mesohabitat Classification

- runs (67%), pools (19%), riffles (14%)
- Riffle –generally less than 1 ft. deep; broken water surface; fast velocity; Bedrock, Particle substrate
- Run 1 to 4 ft. deep; surface is not broken by the bed substrate; moderate velocities; Bedrock, Particle substrate
- Pool –greater than 4 ft. deep; reduced velocities; Artificial and Natural







Fish Community Assessment


Fish were grouped into guilds of species and life stages with similar habitat requirements.

Depth, velocity, substrate, and cover

North Fork Shenandoah River Fish Community:


37 species, 4 guilds

Riffle Guild, Fast-Generalist Guild, Pool-Run Guild, Pool-Cover Guild

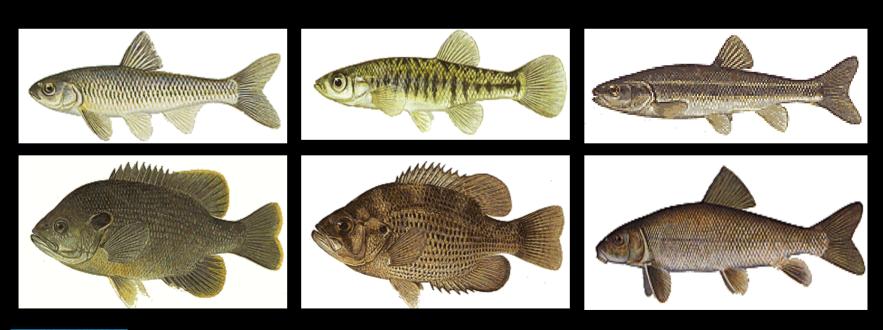



Fish Habitat-Suitability Curves

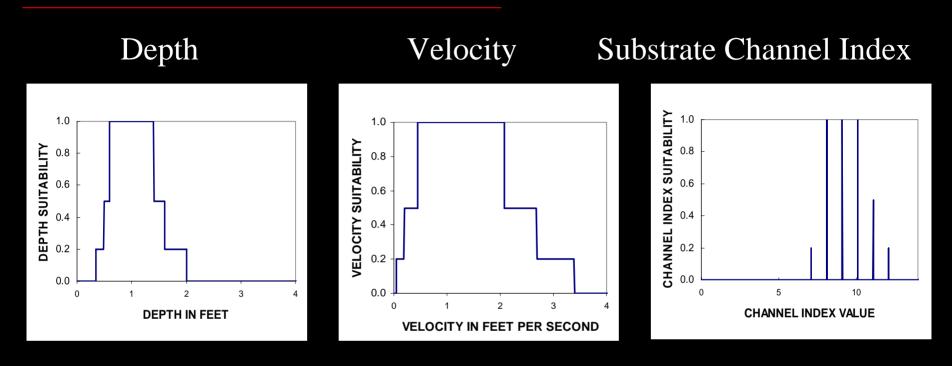

Habitat-suitability criteria (HSC) of fish are based on detailed fish community sampling, habitat observations, and critical analysis of data. The HSC curves represent the physical habitat needs of fish within the North Fork Shenandoah River, and were used in the modeling phase of this research.



Hydraulic-Data Collection




• 6 sites, 36 cross sections

- Measurements at low, medium, and high flows
 - Reach discharge
 - -Water surface elevation
 - Depth, velocity, and substrate




RHABSIM Predictive Model

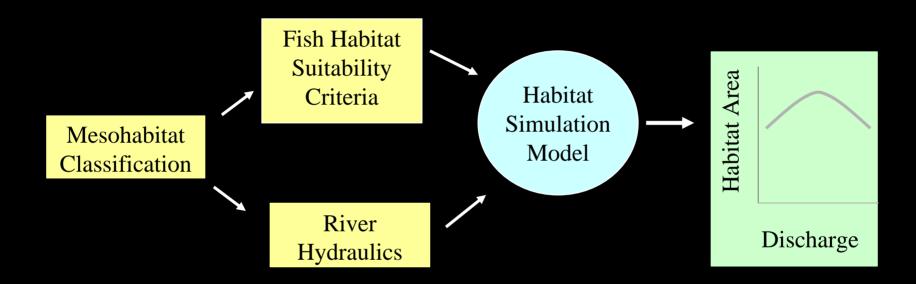

RHABSIM model used to evaluate fish HSC against observed and simulated depths, velocities, and channel index values for each site. Composite habitat suitability rating assigned to each model cell, cross section, and reach for 30 simulated flows.




Habitat-Flow Relation for the Upper River Section

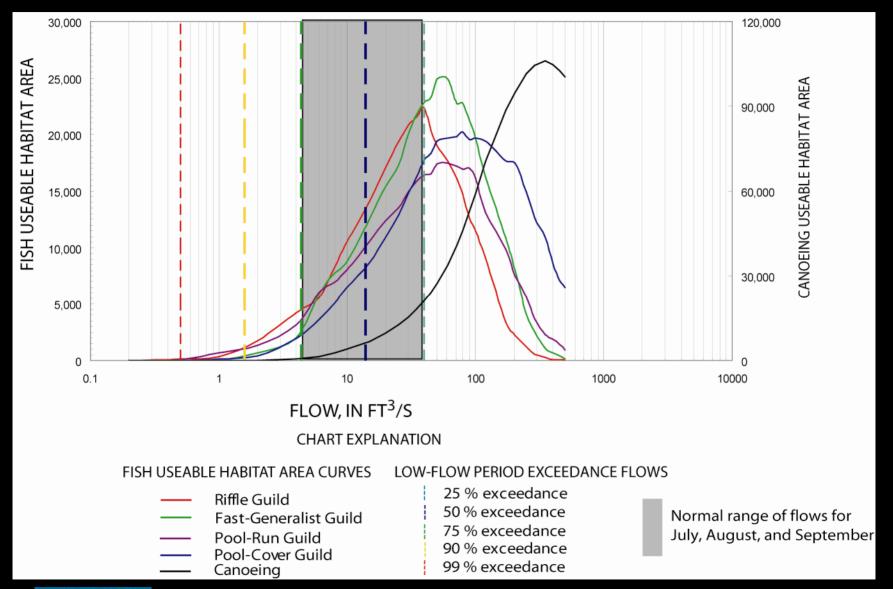



Fast-Generalist Guild 1999 Time Series

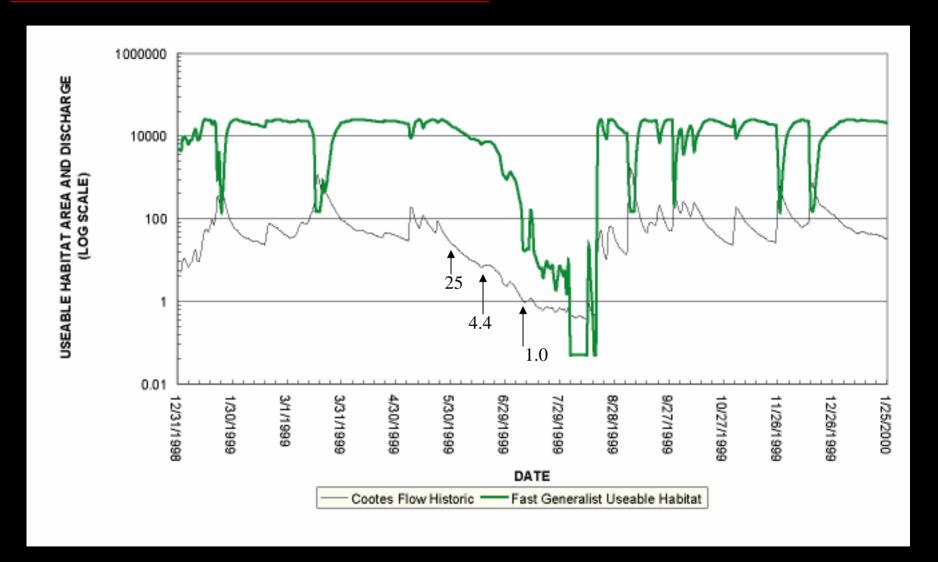



Reduced Water-Withdrawals Scenario

